

How to Flash a BIOS Update onto your EUROCOM ARX15 Laptop

Here is a step by step guide on how to flash an updated BIOS onto your EUROCOM ARX15 Laptop. In these instruction, when your see **ENT** this means select the Enter key.

1. Create a UEFI Bootable USB Key


This is a pretty simple process. Format your USB Key as Fat32. When asked to name the key...give it a name you will remember. Once this is done copy over the EFI info onto the key. This EFI Info can be provided to you if you do not know how to create a bootable UEFI Key.

2. Copy the BIOS Update files into the root of the USB Key


3. Put the USB Key into the USB port on your notebook and re-start your computer.

4. While the computer is re-starting push the F7 key over and over until the computer boots into the boot menu show below


5. Find the USB Key you just created from the list. Select the USB key on the screen and then select Enter on the bottom right

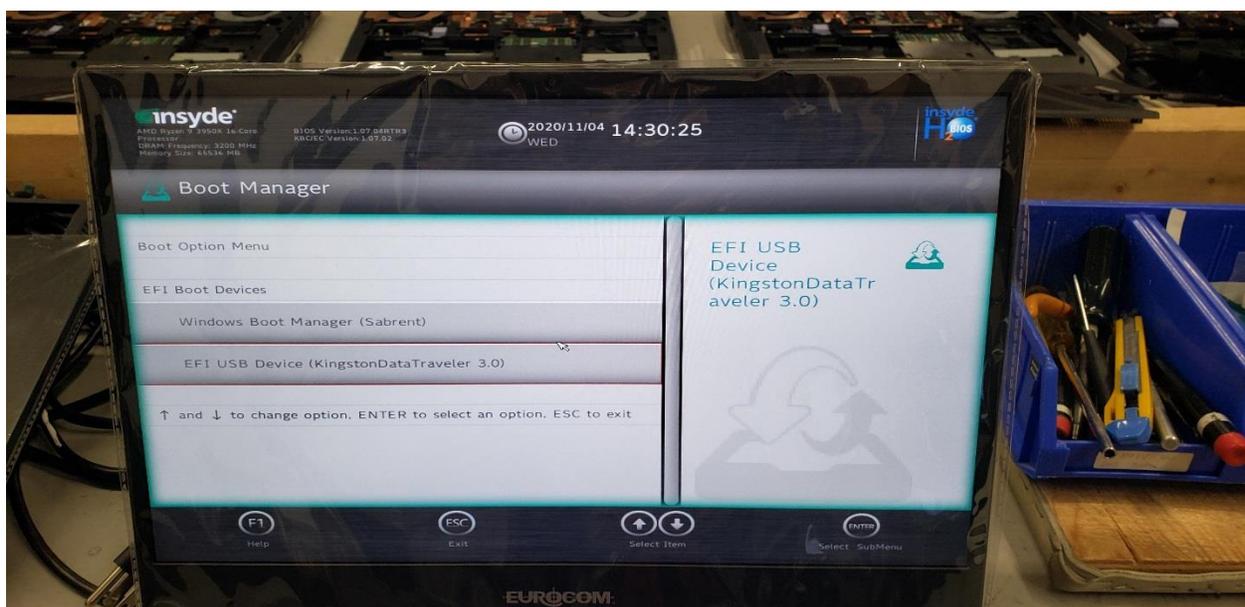


- You will boot into a screen with allot of text. A flashing cursor will be at the bottom after the word Shell>

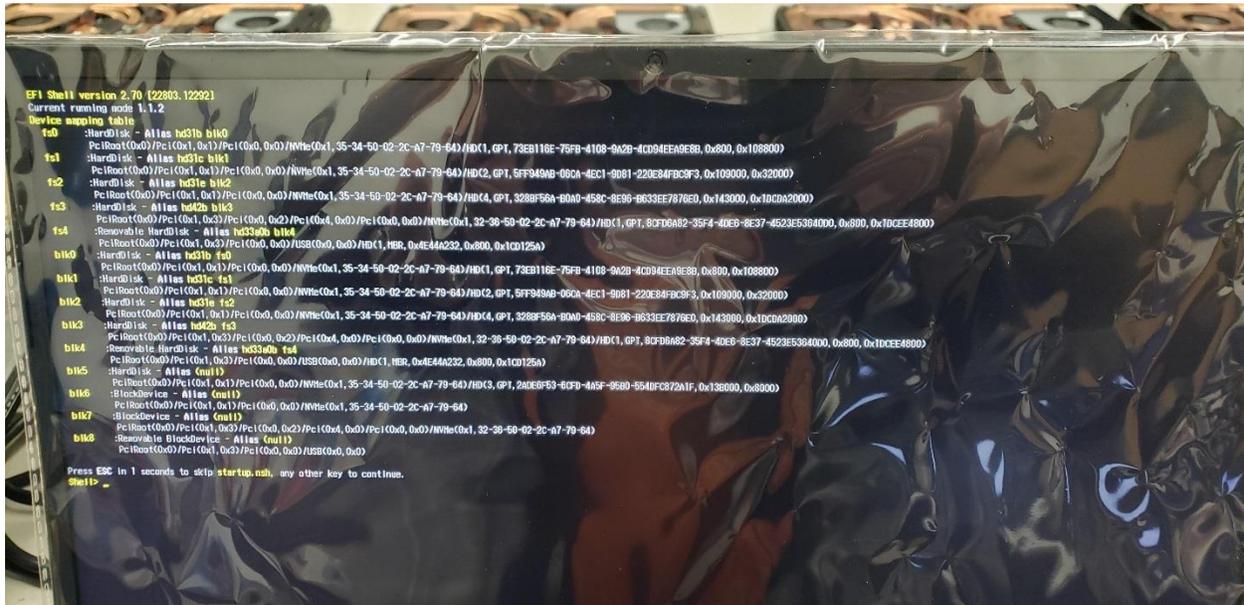


- Type dir **ENT** Find the name of the last fs file in the list and note it down. In this case it is fs4
- Type fs4: **ENT**

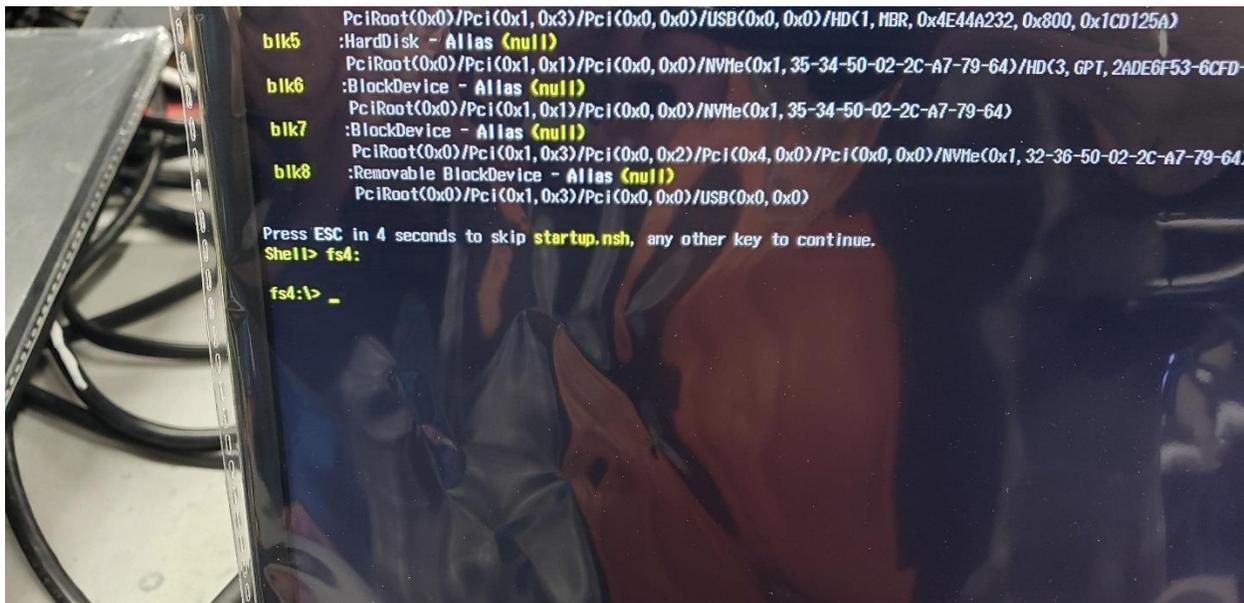


- Type dir **ENT** This will display all the files in the directory. Find the file that contains the new BIOS. In this case it is 0707-EURO
- Type cd 0707-EURO **ENT** to go into the 0707-EURO directory

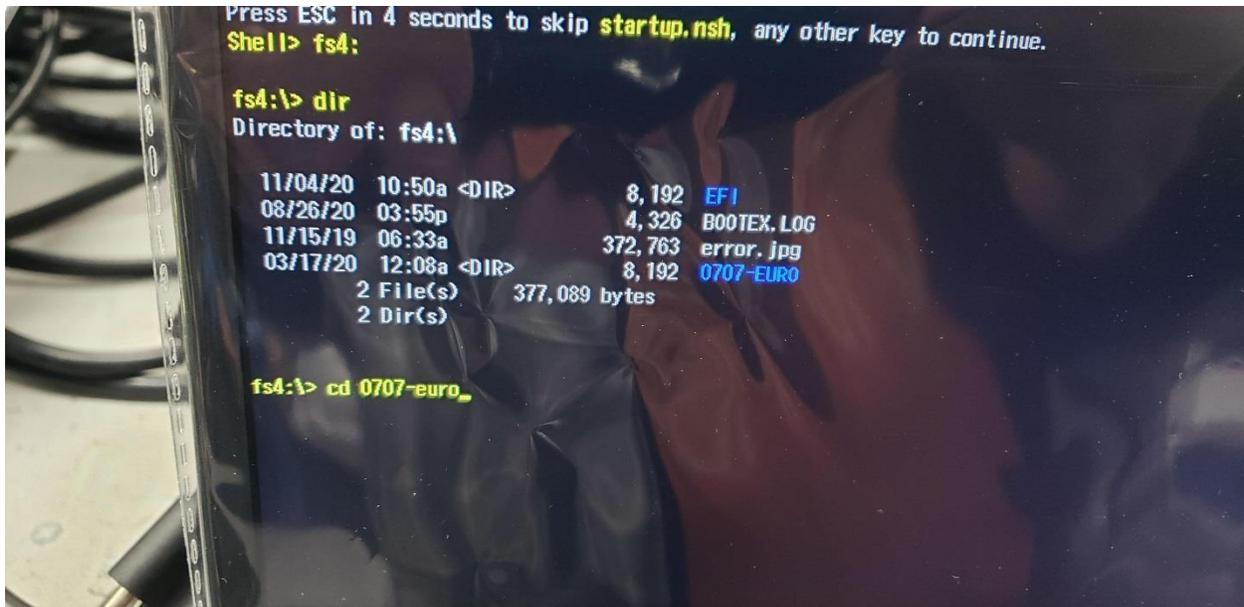

- Type 1st_flash **ENT**

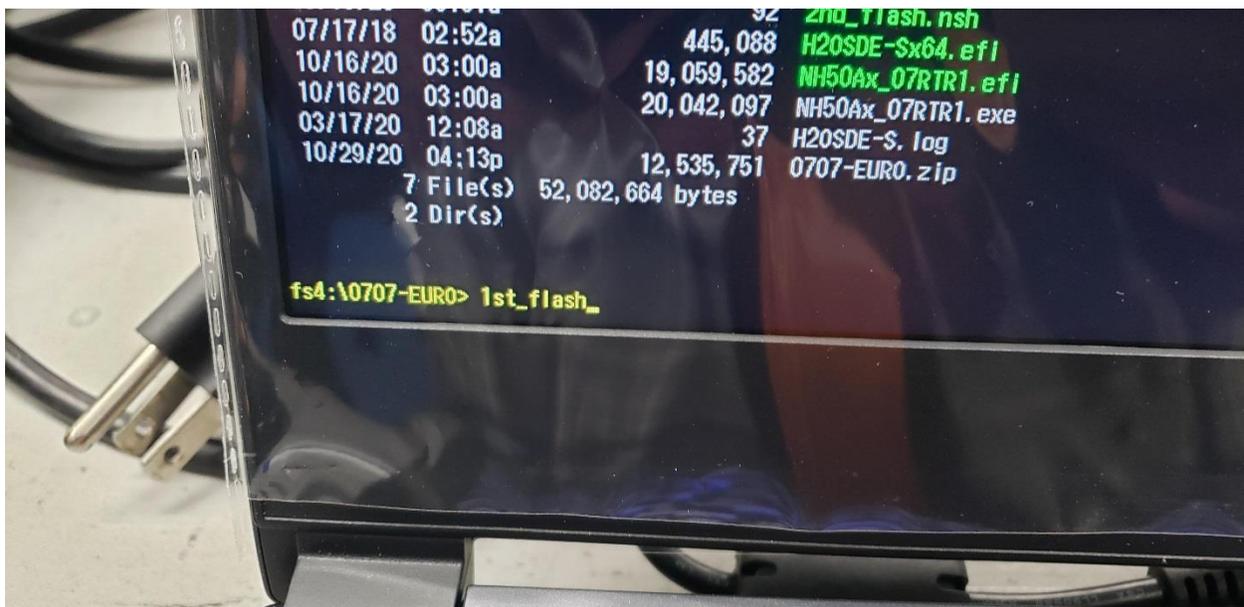


12. The computer will load some files and then shut down.

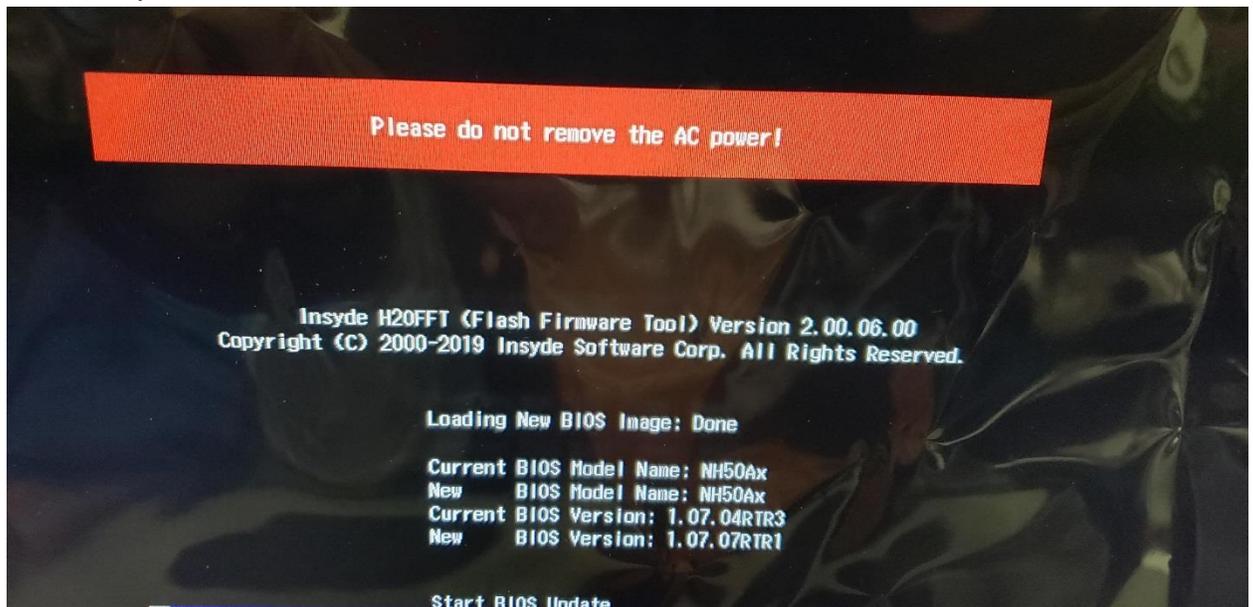


13. Re-start the computer and hit F7 over and over again like above.

14. Follow steps 6 through 9 again...

15. This time Type 2nd-flash Enter

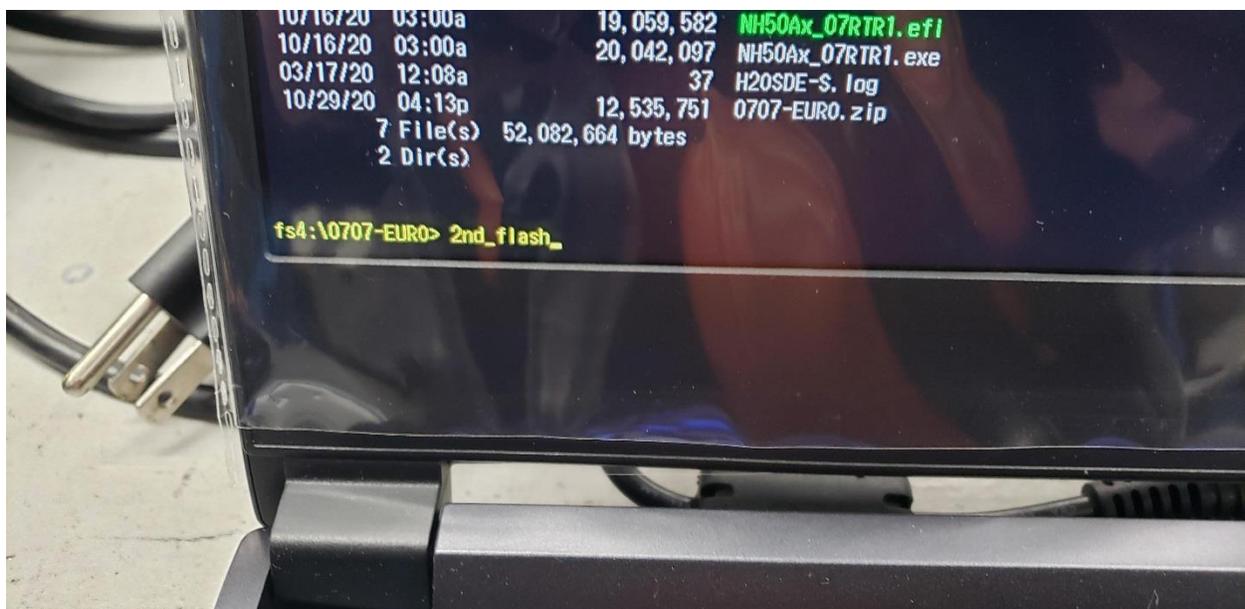

16. After writing files the computer will return to the previous screen

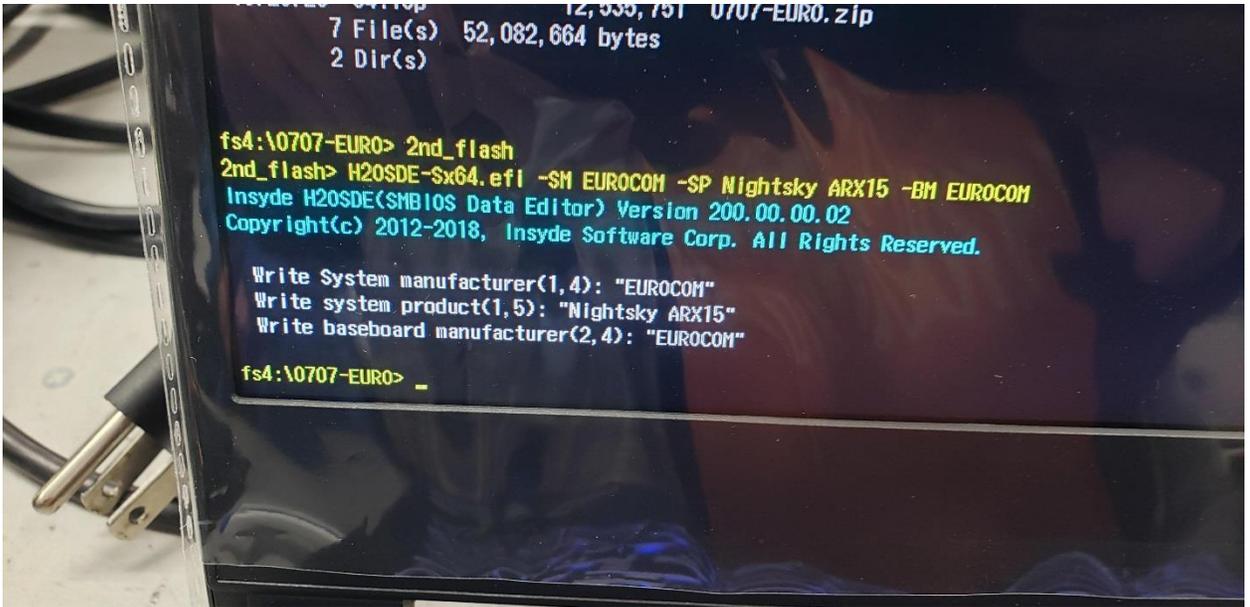

17. From here select Control/Alt/Del and re-start your notebook.

Your BIOS Update is complete!